



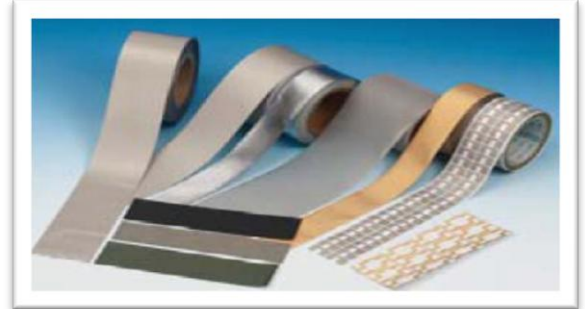

Both Sides Conductive Adhesive Tape: (K3_700D)

(Structure)

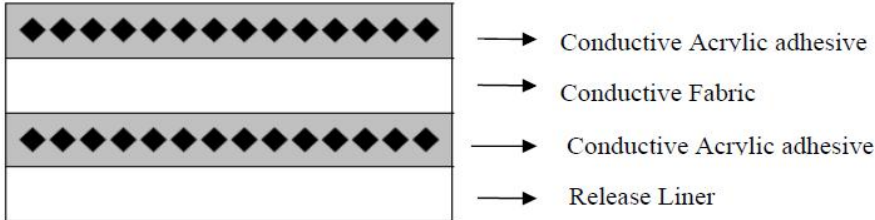

Properties	Unit	Value	Remarks
Backing Thickness	µm	180 ± 10	1/1000 Gauge
Total Thickness	µm	201 ± 20	Release Liner Except
Adhesion to steel (180°Peel)	gf/in	Min 1000	KS A 1107
Holding Power(40C, 1kg)	mm	Max 2	
Surface Conductivity	Ω / in ²	Max 0.3	0.25 Kgf / in ²
Volume Conductivity	Ω / in ²	Max 0.3	J. Dow Method
Width	Ω / in ²	Max. 100	
Length	Mtr/Roll	Min. 50	
	dB	≥ 70 dB (30 MHz – 5 GHz)	As per MIL-G-83528

How to order:

P/N: K3 – 700D – AAA - BBB
(1) (2) (3) (4)

- 1 Series Number
- 2 Material Type
- 3 Width (mm) : Custom Size
- 4 Length (mm) : Custom Size