





**Conductive Copper Tape
Type: K3-Cu-601 CP**

Structure:

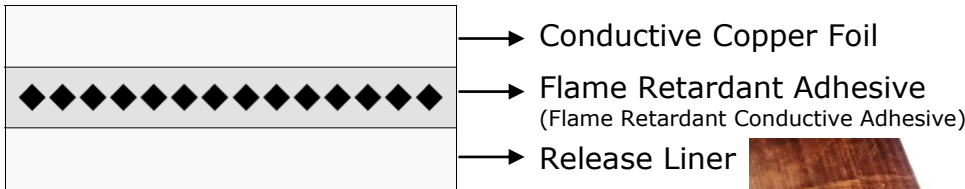

Specification:

Properties	Unit	Value	Remarks
Backing Thickness	µm	40±5	1/1000 Gauge
Total Thickness	µm	70±10	Release liner except
Adhesion to steel (180°Peel)	gf/in	Min. 1000	KS A 1107
Holding Power(40C, 1kg)	mm3	Max. 3	
Flame Retardant	-	Pass	UL-510 FR
Surface Conductivity	Ω / in ²	Max. 0.3	0.25 kgf/ in ²
Volume Conductivity	Ω / in ³	Max. 0.1	1 kgf/ in ²
Width	mm	Max. 1000	
Length	mtr/Roll	Min. 25	
Shielding Effectiveness	dB	≥ 70 dB (30 MHz - 5 GHz)	As per MIL-G-83528

How to order:

P/N: K3 - Cu - AAA - BBB
(1) (2) (3) (4)

- 1 Series Number
- 2 Material Type
- 3 Width (mm) : Custom Size
- 4 Length (mm) : Custom Size