





**Conductive Fabric
Type: K3-FAB-711**

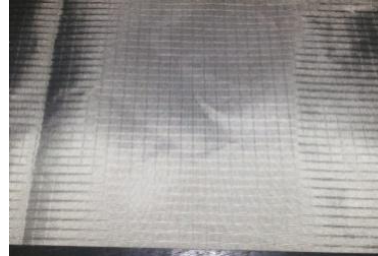

Structure:

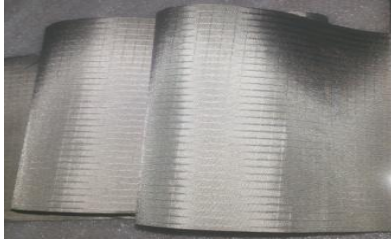

→ Conductive Fabric

Specification

Properties	Unit	Value	Remarks
Material	Polyester (Woven) Coated with Electroless Ni + Cu		
Thickness	µm	10 ± 5	
Flame Retardant	-	Pass	UL-510 FR
Color	-	Gray	
Surface Conductivity	Ω / in ²	Max. 0.3	0.25 kgf/ in ²
Volume Conductivity	Ω / in ²	Max. 0.1	1 kgf/ in ²
Width	mm	Max. 1000	
Length	mtr/Roll	Min. 25	
Shielding Effectiveness	dB	≥ 80 dB (30 MHz – 5 GHz)	As per MIL-G-83528

How to order: P/N: K3-FAB-711 – AAA - BBB
(1) (2) (3) (4)
1 Series No.
2 Material Type
3 Width (mm) : Custom Size
4 Length (mm) : Custom Size