




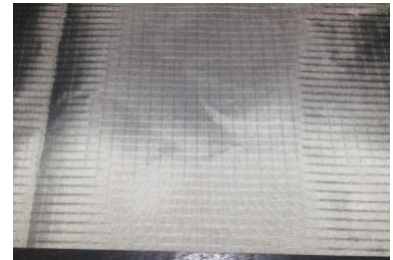

**Conductive Fabric Tape  
Type: K3-FAB-701P**

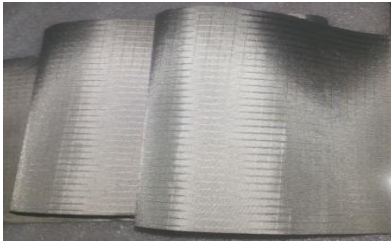

**Structure:**

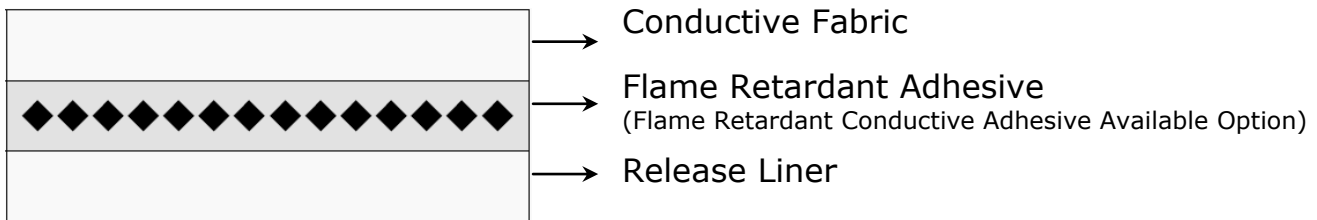

**Specification**

Properties	Unit	Value	Remarks
Material	Polyester (Woven) Coated with Electroless Ni + Cu		
Backing Thickness	µm	100±10	1/1000 Gauge
Total Thickness	µm	110±20	Release liner except
Adhesion to steel (180°Peel)	gf/in	Min. 1000	KS A 1107
Holding Power(40C, 1kg)	Mm 3	Max. 3	
Flame Retardant	-	Pass	UL-510 FR
Color	-	Gray	
Surface Conductivity	Ω / in <sup>2</sup>	Max. 0.3	0.25 kgf/ in <sup>2</sup>
Volume Conductivity	Ω / in <sup>3</sup>	Max. 0.1	1 kgf/ in <sup>2</sup>
Width	mm	Max. 1000	
Length	mtr/Roll	Min. 25	
Shielding Effectiveness	dB	≥ 80 dB (30 MHz – 5 GHz)	As per MIL-G-83528

How to order: P/N: K3-FAB-701P – AAA - BBB

(1) (2) (3) (4)

- 1 Series No.
- 2 Material Type
- 3 Width (mm) : Custom Size
- 4 Length (mm) : Custom Size