




Shielding Performance:

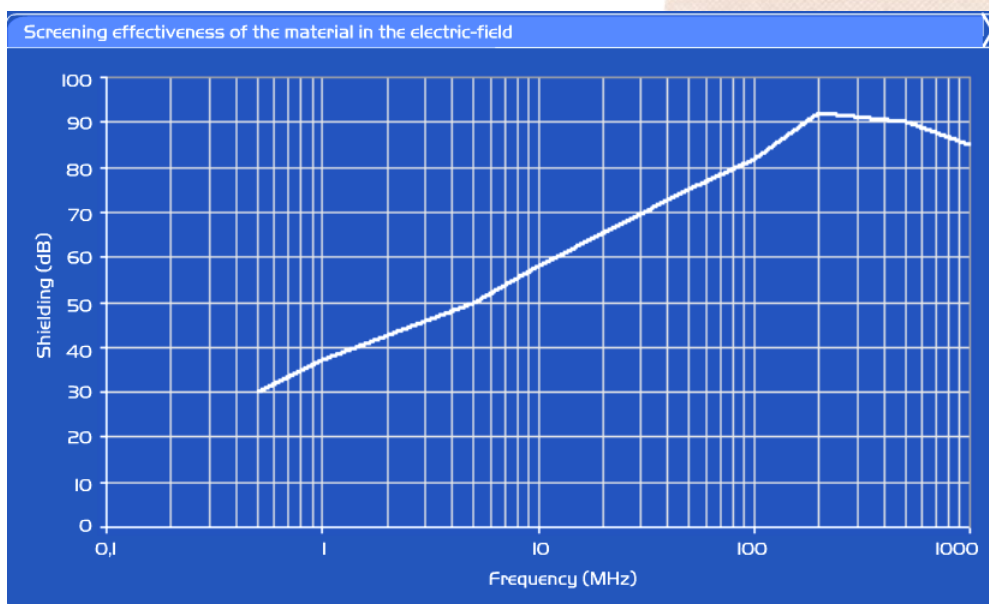

Specifications:

- Surface Resistivity : 0.01 to 0.03  $\Omega / \text{cm}^2$
- Temperature Range : -30  $^{\circ}\text{C}$  to +90  $^{\circ}\text{C}$
- Thickness : 0.18 to 0.22 mm
- Single Width : 960 mm  $\pm$ 10 mm
- Weight : Approx 60 gm/m<sup>2</sup>
- Shielding effectiveness :  $\geq$  80 dB